

Project Name: _____	AIA #
Location: _____	SIS #
Item #: _____ Qty: _____	

Model:Freezer Base (Self-Contained)
Cyclopenthane Foaming
Standard Features

- Available in 32", 36", 48", 60, 64", 72", 84", 96", 108" and 120" widths that can support any of the modular sectional range tops
- Self-closing heavy-duty drawers slide on stainless steel rollers
- Drawers hold standard sized (12" x 20" x 4") pans -pans not included
- CFC-free refrigeration system has an expansion valve for rapid temperature recovery
- Foamed-in-place CFC-free polyurethane insulation provides highest insulation factor available
- Rubber magnetic door gaskets provide a positive seal and easy cleaning
- The top, front, sides, back, drawers, and interior cavity are made of stainless steel
- 6" adjustable stainless steel legs
- Interior corners are covered for easy cleaning (meets NSF standard #7)
- Condensate evaporator pan is standard (72", 84", 96", 108" & 120" only).
- Adjustable digital thermostat
- Mullion coils are coated to resist corrosion and provide maximum air flow for even cooling
- Operates on 220-volt single phase 50Hz AC power
- Warranty: two years on specified operational parts, five years on compressor, and one year on labor from date of purchase

30032SB-EU (32" wide); 30036SB-EU (36" wide);
 30048SB-EU (48" wide); 30060SB-EU (60" wide);
 30064SB-EU (64" wide); 30072SB-EU (72" wide);
 30084SB-EU (84" wide); 30096SB-EU (96" wide);
 30108SB-EU (108" wide); 30120SB-EU (120" wide)


STANDARD CONSTRUCTION SPECIFICATIONS

Exterior Finish: Top, front, sides, back, drawers, and interior cavity are 304 stainless steel #3 polish.


Drawers: Stainless steel -hold standard size (12" x 20" x 4") pans -not included. Removable drawer assembly.

Base: Self-contained, 32-1/2" deep and 26" high, including adjustable legs or casters

Refrigerant: R-404a -CFC-free

Temperature Range: -8° / 14° F


Approvals:
Avvailable at:

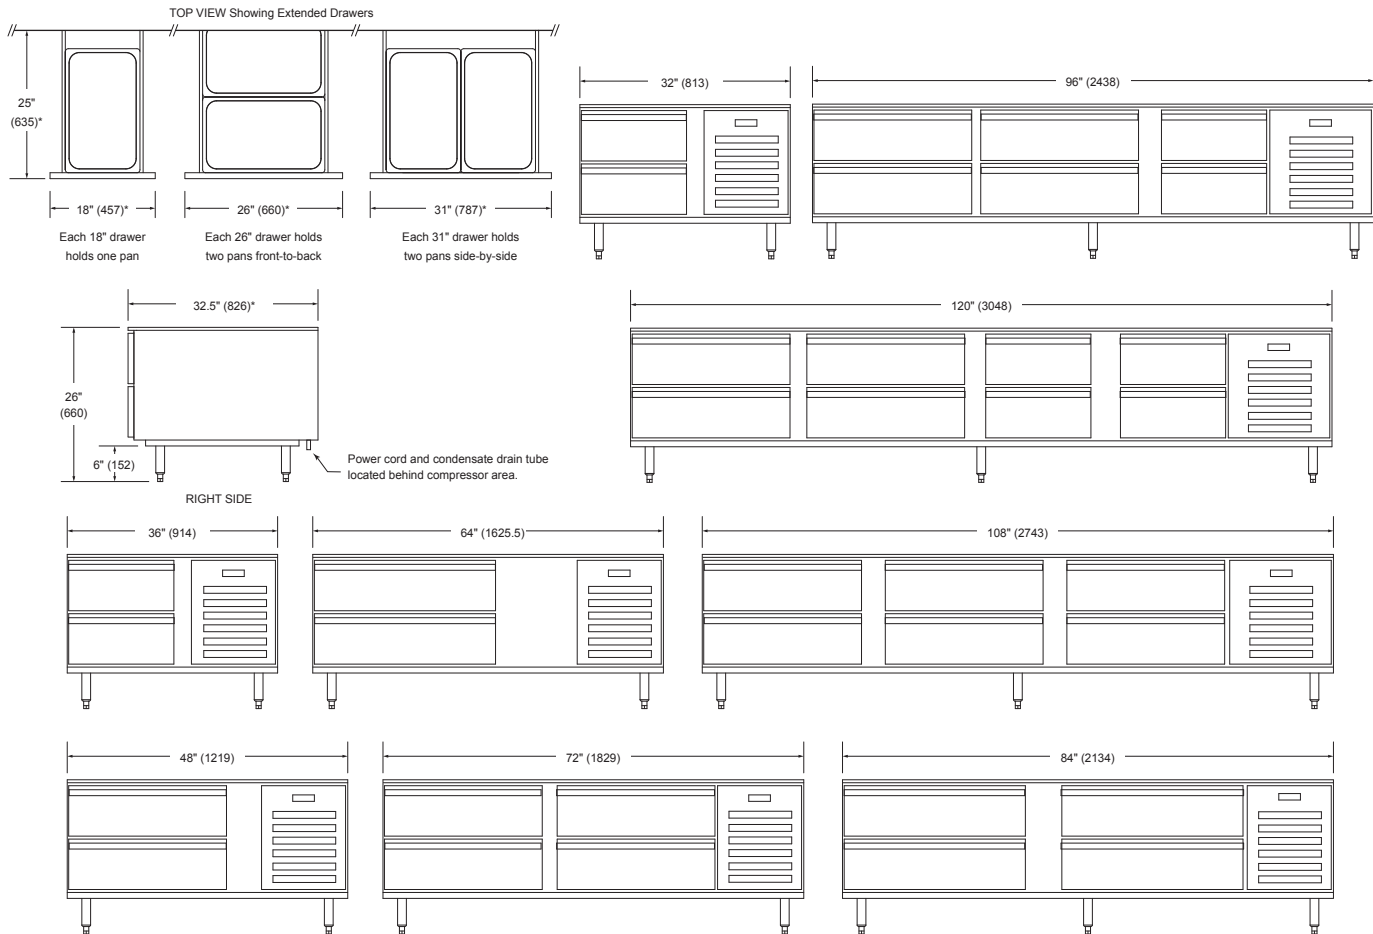

The drawer-front width, drawer-extension distance, and overall depth may vary (the maximum values are specified and shown)

UTILITY INFORMATION

Model	Width	# of Drawers			# of Pans	Cooled Volume cu. ft (cu. m.)	Cooling Cap BTU/hour	Electricity 120V Amps	Compressor Motor	Shipping Weight
		18"	26"	31"						
20032SB-EU	32"	2	-	-	2	4 (0.11)	1450	8	1/3 H.P.	340 lbs (154 kg)
20036SB-EU	36"	2	-	-	2	4 (0.11)	1450	8	1/3 H.P.	340 lbs (154 kg)
20048SB-EU	48"	-	2	-	4	6.7 (0.19)	1670	8	1/3 H.P.	410 lbs (186 kg)
20060SB-EU	60"	-	-	2	4	10 (0.28)	1802	8	1/3 H.P.	550 lbs (249 kg)
20064SB-EU	64"	-	-	2	4	10 (0.28)	1802	8	1/2 H.P.	550 lbs (249 kg)
20072SB-EU	72"	-	4	-	8	13 (0.37)	1875	10.1	1/2 H.P.	650 lbs (295 kg)
20084SB-EU	84"	-	-	4	8	16 (0.45)	1920	10.1	3/4 H.P.	745 lbs (338 kg)
20096SB-EU	96"	2	4	-	10	18 (0.51)	1955	20	3/4 H.P.	855 lbs (388 kg)
20108SB-EU	108"	-	6	-	12	22 (0.62)	1955	20	3/4 H.P.	960 lbs (435 kg)
20120SB-EU	120"	4	4	-	12	25.5 (0.72)	2000	20	3/4 H.P.	1075 lbs (488 kg)

Amperage is approximate and is for compressor only. Do not use for breaker sizing.

All models have a six foot power cord with a grounded plug to receive 50Hz or 60Hz single-phase AC. Condensate drain is a 1/2" inside diameter vinyl tube.

MISCELLANEOUS

- If casters are used with flex hose, a restraining device should be used to eliminate undue strain on the flex hose.
- Minimum clearance on rear is 2" (51 mm)
- Modular range top sections can be mounted directly on top using an insulated base adapter.
- Can be part of sectional battery, provided that the adjoining base sections are insulated, or do not produce heat.
- Avoid locating where the temperature will drop below 55°F or rise above 90°F
- Check local codes for fire and sanitary regulations.

NOTICE:

Desmon has a policy of continuous product research and improvement. We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.

OPTIONS AND ACCESSORIES

- Electric condensate evaporator pan (32", 36", 48", 60" & 64")
- Cable restraint kit (to restrict movement when on casters)

- Casters -front two casters lock
- Open-frame base with casters

INTENDET FOR COMMERCIAL USE ONLY.
NOT FOR HOUSEHOLD USE.

WARRANTY

Two years warranty on parts



DESMON
Professional Refrigeration